


Customised Load measuring pin KAL / KAL-E

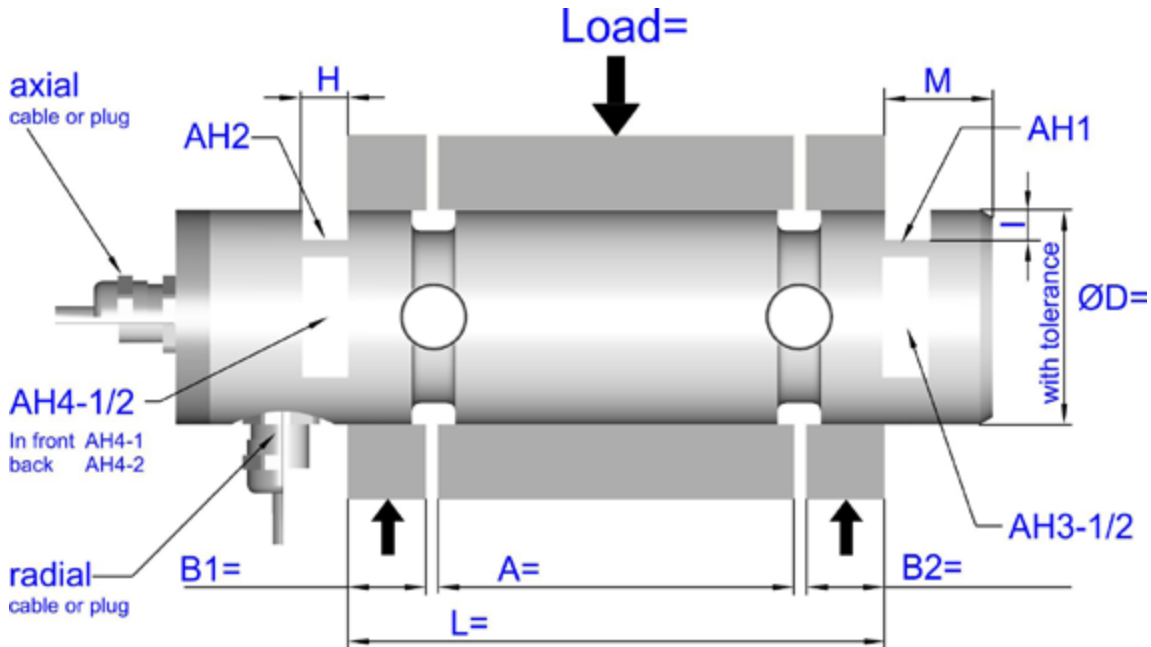

Axle holder by DIN 15058

D	H	I	M
> 20... 25	5.2	4.0...4.5	10
> 25... 40	6.2	4.5...6.5	12
> 40... 50	8.3	6.5...7.0	15
> 50... 63	8.3	7.0...9.5	16
> 63...100	10.5	10...14	20
>100...160	13	15...20	25

Position for axle holder

AH1	AH2	AH3/1	AH3/2	AH4/1	AH4/2

Output

Fixed cable on the sensor	<input type="checkbox"/>	Plug on the sensor	<input type="checkbox"/>	M12	<input type="checkbox"/>	other	<input type="checkbox"/>
Connection cable	<input type="text" value="m"/>						
Output signal	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		
	mV/V		CANopen				
	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		
	4-20mA (3-wire)		0 ... 10V		other		

Option

Grease drilling	<input type="checkbox"/>	ATEX	<input type="checkbox"/>	Zone 0	Zone 20
Redundant system (from 30 mm outside Ø)	<input type="checkbox"/>			Zone 1	Zone 21
				Zone 2	Zone 22
Quantity	<input type="text" value="Piece"/>			no	